



## PRODUCT

**SC 4000**  
**STUCCO CLAD PANEL**  
 Thickness: 3/4"  
 Height: 48"  
 Width: 96"  
 Weight: 80 lbs  
 Area: 32 sq ft


**SC 4002**  
**STUCCO CLAD PANEL**  
 Thickness: 3/4"  
 Height: 24"  
 Width: 96"  
 Weight: 40 lbs  
 Area: 16 sq ft

**SC 4004**  
**STUCCO CLAD CORNER**  
 Thickness: 3/4"  
 Height: 48"  
 Outside Width: 48"  
 Inside Width: 47"  
 Weight: 80 lbs  
 Area: 32 sq ft

**SC 4006**  
**STUCCO CLAD CORNER**  
 Thickness: 3/4"  
 Height: 24"  
 Outside Width: 48"  
 Inside Width: 47"  
 Weight: 20 lbs  
 Area: 16 sq ft

**SC 4003**  
**STUCCO CLAD CORNER**  
 Thickness: 3/4"  
 Height: 48"  
 Outside Width: 24"  
 Inside Width: 23 1/2"  
 Weight: 40 lbs  
 Area: 16 sq ft


4' x 8' SERIES

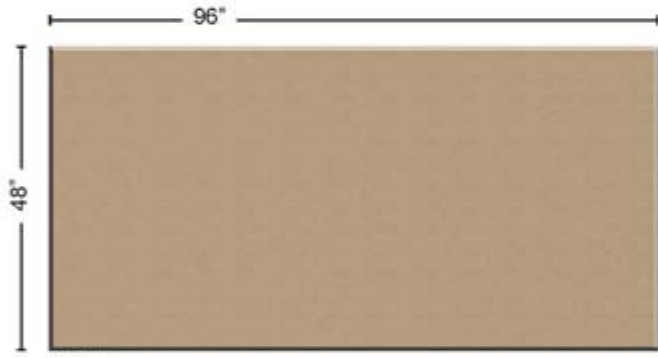

SC 4000



SC 4002

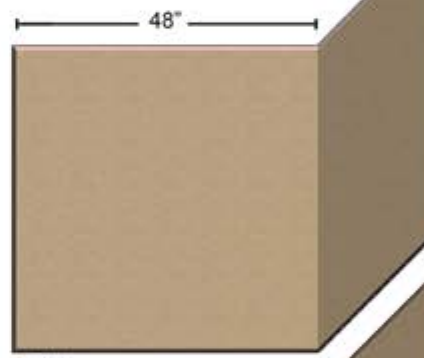

SC 4004



SC 4006



SC 4003



Custom sizing options available

Also available in 5' x 10' panels

COLORS



6108 Latte



7037 Balanced Beige



7011 Natural Choice



7017 Dorian Grey



0000 Dark Grey



Custom Colors Available


4000



4000 - 800



4000 - 801

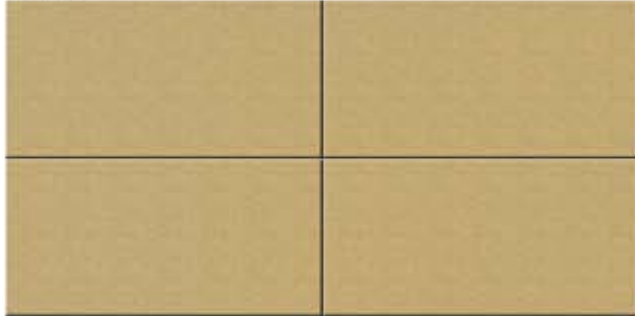

4000 - 803



4000 - 804



### Engineering Specifications

Properties	Test	Units	Value
<b>Density</b>			
Specific Gravity	ASTM D-792	g/cc	0.50 (Nominal)
Apparent Density	ASTM D-1622	lbs/ft <sup>2</sup>	31
Shore Hardness	ASTM D-2240	"D"	78
<b>Stress - Strain Flexural</b>			
Tensile Strength	ASTM D-638	PSI	1460
Elongation at break	ASTM D-638	%	36
Flexural Modulus	ASTM D-790	PSI	160,000
Flexural Strength			3550
<b>Performance at Elevated Temperature</b>			
Dimensional Change:			
120 min @ 158° F	ASTM D-1042	%	+0.3
75 min @ 284° F			+1.3
<b>Impact Resistance</b>			
@ 70° F	ASTM D-2794	in/lbs	160+
@ 30° F			160+
@ 0° F			140



More designs available. Ask about custom patterns