






FAST AND EASY TRANSFORMATIONS



PROFESSIONAL ARCHITECTURAL WALL PANEL SERIES

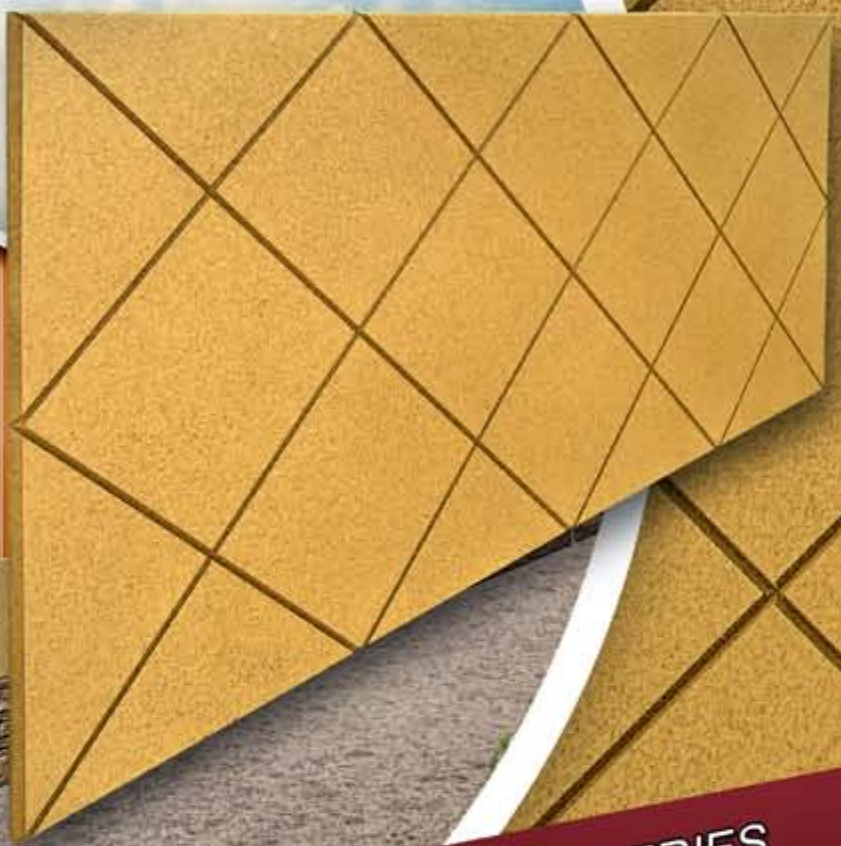

**ARCHITECTURAL
PANELS WITH
UNLIMITED DESIGN
OPTIONS FOR
FAST AND EASY
TRANSFORMATIONS**

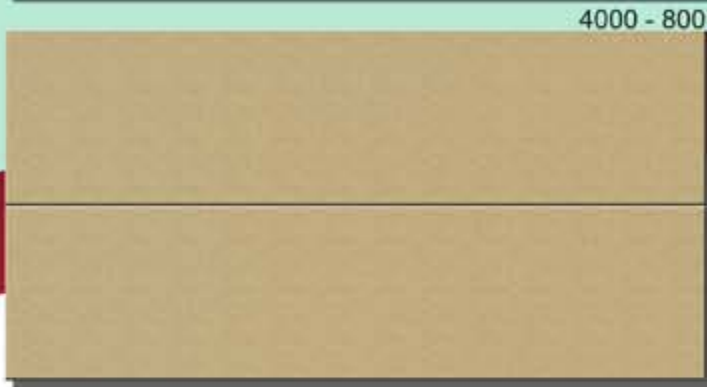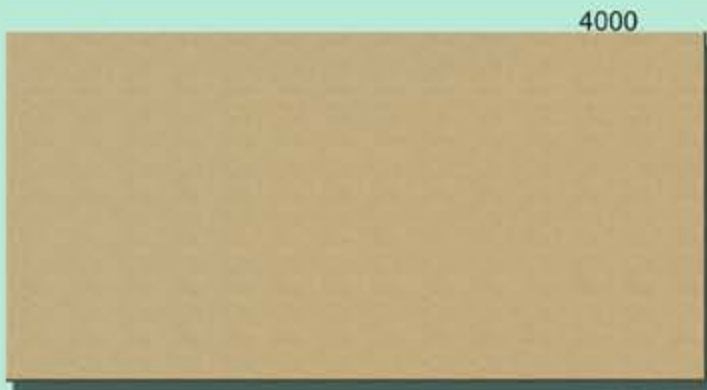

STUCCO CLAD - by Replications Unlimited is a synthetic textured architectural panel designed to compliment stone, brick and CMU exterior designs. These panels can be considered a replacement for stucco and EIFS systems.

The *STUCCO CLAD* textured panels are constructed out of PVC foamed board. These boards are available in standard and custom solid color schemes and various designs can be routed into the surface.



- System provides wide range of architectural design options
- Available in a wide range of colors, sizes and shapes
- Ability to add corporate brand into design
- Suitable for new and remodeling projects
- Panels are extremely tough and durable

SPECIFICATIONS



**SC 4000
STUCCO CLAD PANEL**
Thickness: 3/4"
Height: 48"
Width: 96"
Weight: 80 lbs
Area: 32 sq ft

**SC 4002
STUCCO CLAD PANEL**
Thickness: 3/4"
Height: 24"
Width: 96"
Weight: 40 lbs
Area: 16 sq ft

Also available in 5' x 10' panels

**SC 4004
STUCCO CLAD CORNER**
Thickness: 3/4"
Height: 48"
Outside Width: 48"
Inside Width: 47"
Weight: 80 lbs
Area: 32 sq ft

**SC 4006
STUCCO CLAD CORNER**
Thickness: 3/4"
Height: 24"
Outside Width: 48"
Inside Width: 47"
Weight: 20 lbs
Area: 16 sq ft

**SC 4003
STUCCO CLAD CORNER**
Thickness: 3/4"
Height: 48"
Outside Width: 24"
Inside Width: 23 1/2"
Weight: 40 lbs
Area: 16 sq ft

Custom sizing options available

COLORS



6108 Latte



7037 Balanced Beige



7011 Natural Choice



7017 Dorian Grey



0000 Dark Grey


DESIGN CONCEPTS





Engineering Specifications

Properties	Test	Units	Value
Density			
Specific Gravity	ASTM D-792	g/cc	0.50 (Nominal)
Apparent Density	ASTM D-1622	lbs/ft ³	31
Shore Hardness	ASTM D-2240	"D"	78
Stress - Strain Flexural			
Tensile Strength	ASTM D-638	PSI	1460
Elongation at break	ASTM D-638	%	36
Flexural Modulus	ASTM D-790	PSI	160,000
Flexural Strength			3550
Performance at Elevated Temperature			
Dimensional Change:			
120 min @ 158° F	ASTM D-1042	%	+0.3
75 min @ 284° F			+1.3
Impact Resistance			
@ 70° F	ASTM D-2794	in/lbs	160+
@ 30° F			160+
@ 0° F			140

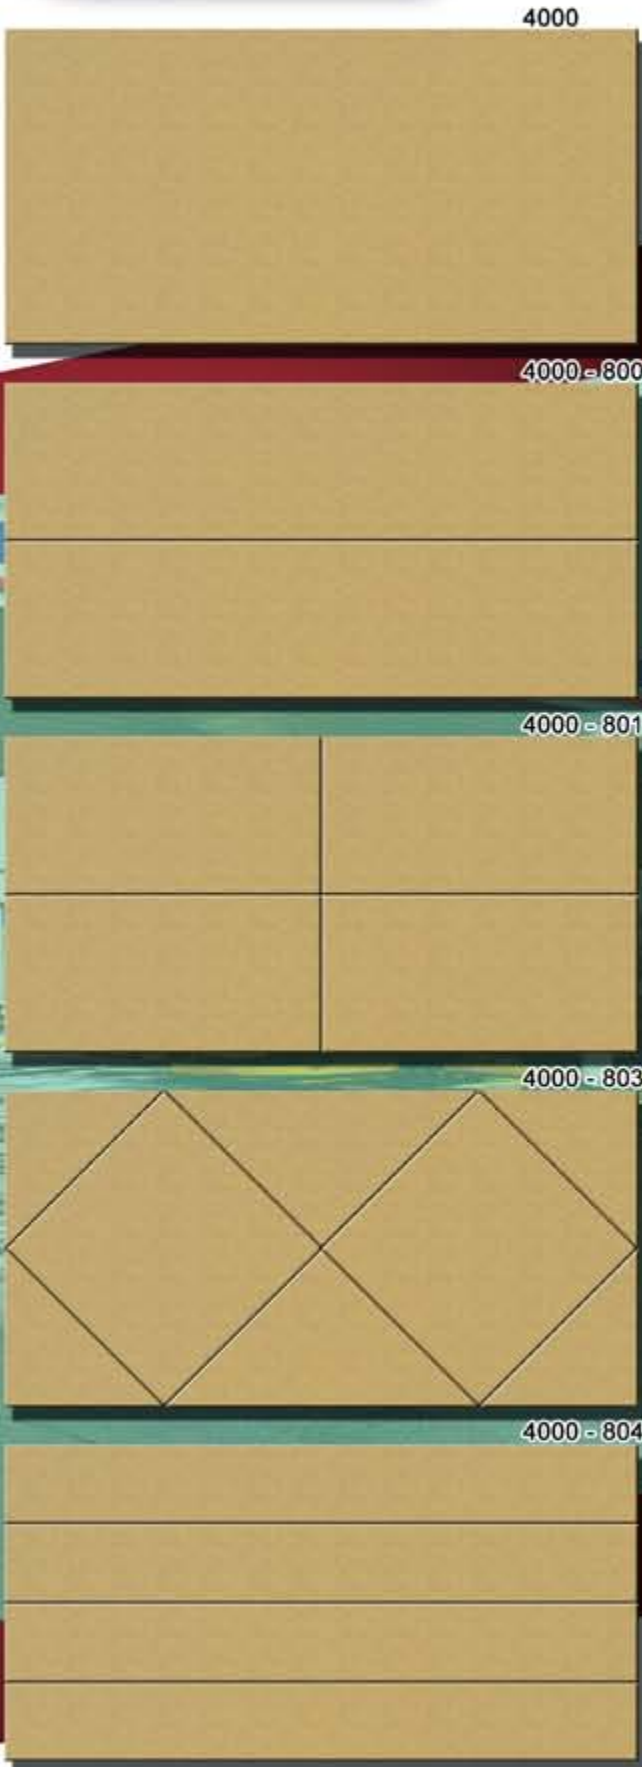

REPLICATIONS UNLIMITED
 9200 Latty Ave. • Hazelwood, MO 63042
 p: 314 - 524 - 2040 f: 314 - 524 - 4040
WWW.URESTONEPANELS.COM